


# Photron

Revolutionary Fast and Simple Motion Analysis




## 6D-MARKER

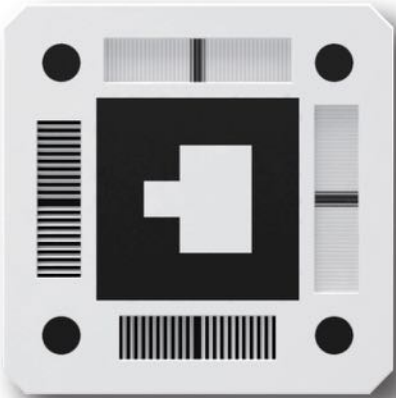

THREE-DIMENSIONAL IMAGE MEASUREMENT IN SIX DEGREES OF FREEDOM (POSITION AND ORIENTATION)  
REQUIRING ONLY A SINGLE CAMERA AND MARKER TARGET



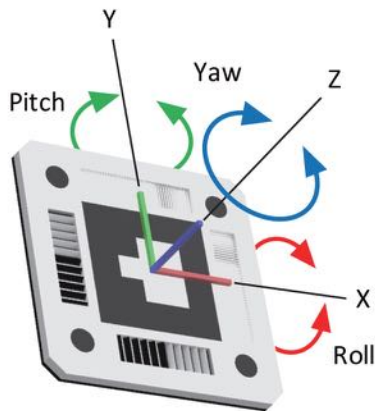

## What is the 6D-Marker Analyst?

The 6D-Marker is a simple motion capture system that can track and measure 3D image data with six degrees of freedom (X, Y, Z, Roll, Pitch and Yaw) using only one camera and one 6D-Marker.


Features: Completely New Motion Capture System

### A new concept in high precision AR (Augmented Reality) marker technology

With 6D-Marker's high precision printed reference points at the four corners, six degree of freedom (X, Y, Z, Roll, Pitch and Yaw) can be measured using only a single marker.

The VMP (variable moiré pattern) placed on the upper and right hand sides of the marker is a lenticular lens with a moiré pattern that changes according to the viewing angle. It can measure the markers orientation angle more accurately than conventional AR markers when the image was shot from the front.


In addition, the FDP (flip detection pattern), located on the left hand and lower sides is the part where the black and white pattern is reversed according to the viewing angle, and indicates the markers physical orientation. The symbol at the center of the marker is used to identify each marker, with up to 32 (0 - 31) variations available.

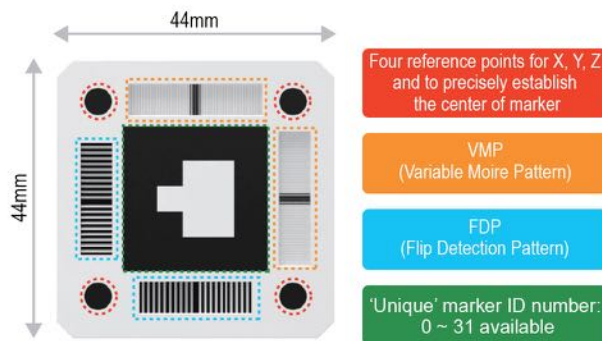

### Simple one camera solution

Typical motion capture and 3D image measurement systems require precisely calibrating two or more cameras within a large dedicated space, with the cameras being located at pre-determined positions.

With Photron's 6D-Marker Analyst", the only pre-test setup required is a simple calibration, and the equipment configuration is as simple as connecting one camera to your laptop PC and affixing one or more markers to the test subject.

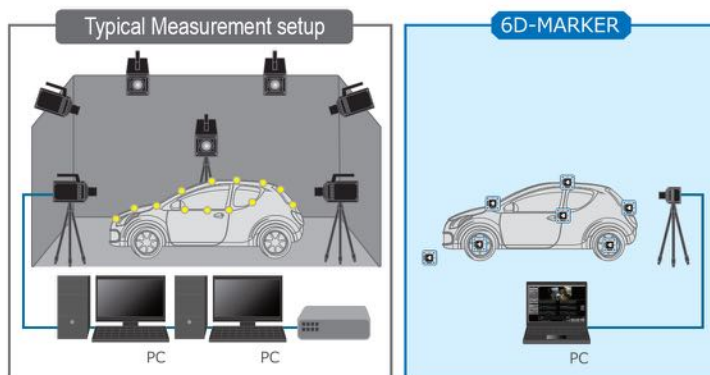

### Supports FASTCAM Mini series

In addition to selected USB cameras, 6D-Marker Analysis software directly controls the latest generation FASTCAM high-speed cameras from Photron. With a high-speed camera, it is possible to measure high-speed behavior such as vehicle impacts and dummy interactions in automotive safety testing.


You can also import video data (AVI / WMV / MP4 format) captured with just about any camera type or brand, high-speed or otherwise, providing you have created the simple calibration file.





# Application Examples

Expanding the world of motion capture and analysis

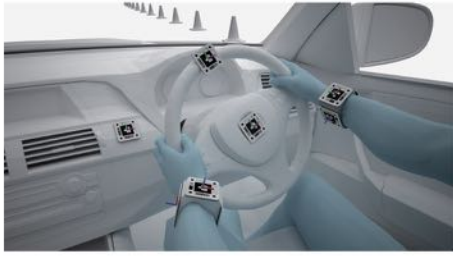

Steering movement



Biomechanics



Automotive safety test



Robotics



Aerospace and Defense



Kinesiology - understanding worker performance


## Main Function

Key considerations required for measurement



### Calibration

The set up before measurement requires lens calibration only. As long as the lens focus and zoom are fixed, you do not need to recalibrate when you move the camera.

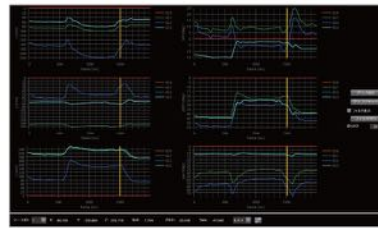

### Graph Display

Each markers ID and 6 DOF elements can be displayed graphically. Smoothing filters and data interpolation are also available.



### Automatic Tracking

Photron 6D-Marker Analysis automatically identifies and tracks the 6D-Markers visible in the image. IDs are automatically recognized and identified for easy measurement.




### Coordination Setting

Coordinate origin can be selected from the camera's optical center, or the center of any marker visible. When the marker is defined as the origin, measurement is possible even if the camera shakes or vibrates as long as that marker is visible.



### Video Overlay Display


Unlike typical motion capture, you can display measurement points, trajectories, coordinate axes, IDs, etc. superimposed atop the recorded images. Or you can rotate, zoom, etc. the markers with the images hidden so as to better understand the objects motion.

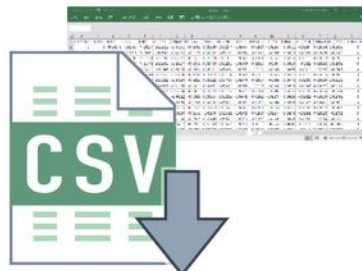

### Data Output

Measurement results can be output in CSV format. The "Position" (X, Y, Z) and "Orientation" (Roll, Pitch, Yaw: Rotation matrix)" of each marker can be output for each "image frame number".

# System Configuration

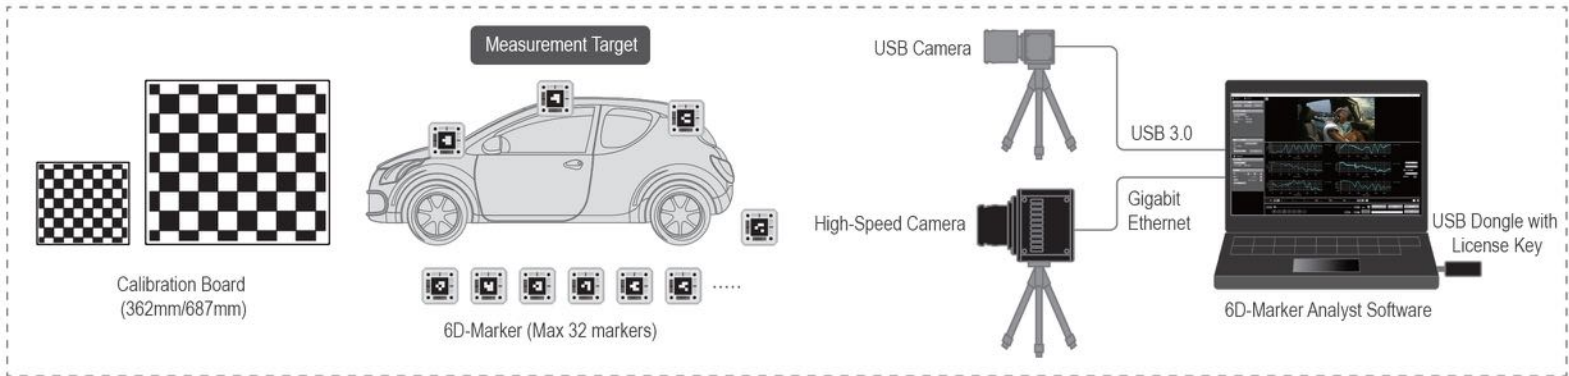

## Supported Camera and Measurement Range

Camera		2.3MP Camera		FASTCAM Mini WX	
Resolution		1920 x 1200 pixel		2048 x 2048 pixel	
Recommended focal length lens		12 mm	25 mm	20 mm	50 mm
Horizontal field of view angle		50.2°	25.4°	54.2°	23.1°
Calibration Using the 362mm card	Stable accuracy distance	460 ~ 1200 mm	1270 ~ 2600 mm	400 ~ 630 mm	1100 ~ 1600 mm
	Stable accuracy area range	430 ~ 740 mm	560 ~ 1180 mm	420 ~ 650 mm	440 ~ 650 mm
Calibration Using the 687mm card	Stable accuracy distance	660 ~ 1200 mm	2020 ~ 2600 mm	680 ~ 1200 mm	2000 ~ 3000 mm
	Stable accuracy area range	620 ~ 1180 mm	910 ~ 1180 mm	700 ~ 1200 mm	800 ~ 1200 mm
Measurement Accuracy X,Y & Z in millimeters		X,Y : ± 0.081% Z : ± 0.146%	X,Y : ± 0.086% Z : ± 0.334%	X,Y : ± 0.081% Z : ± 0.146%	X,Y : ± 0.081% Z : ± 0.146%
		X,Y : ± 0.348 ~ 0.956 mm Z : ± 0.672 ~ 1.75 mm	X,Y : ± 0.482 ~ 1.01 mm Z : ± 4.24 ~ 8.68 mm	X,Y : ± 0.340 ~ 0.972 mm Z : ± 0.584 ~ 1.7 mm	X,Y : ± 0.378 ~ 1.032 mm Z : ± 3.67 ~ 10.02 mm
Measurement Accuracy Roll, Pitch & Yam on degrees		Roll, Pich, Yaw: 0.777°	Roll, Pich, Yaw: 0.939°	Roll, Pich, Yaw: 0.777°	Roll, Pich, Yaw: 0.939°

## Specifications

### 6D-MARKER Analyst

Supported OS	Windows7 SP1/8.1/10 (64bit only)
Supported camera	Certain USB3.0 cameras from Toshiba and Basler, and newer Photron FASTCAM cameras
Max number of markers when using simultaneously	From 1 to 32 markers in a single session (Must be captured at a resolution of 40 pixels or more between marker reference points)
Measurement output data	Six degrees of freedom (X, Y, Z, Roll, Pitch, Yaw)
Measurement data output format	CSV
Video data input format	AVI, WMV, MP4, BMP, PNG, TIFF

### System Includes

- 6D-MARKER Analyst Installation CD x 1
- MARKER FILES CD x 1
- License Dongle x 1
- Calibration board (362mm or 687mm) x 1
- 6D-MARKER 44mm x 4

### Optional Accessories

- Additional 6D-MARKER 44mm
- 6D-MARKER 200mm
- Additional Calibration board (362mm or 687mm)
- Additional 6D-MARKER Analyst software license
- Marker centering sheet
- Selected Toshiba Teli USB cameras
- Selected Basler USB cameras
- Newer model FASTCAM series high-speed camera

### 6D-MARKER 44 mm

Marker size	44.0 (W) x 44.0 (H) x 2.4 (D) mm
Weight	5.0g

# Photron

9520 Padgett Street Ste 110  
San Diego, CA 92126  
P: 1.800.585.2129  
info@photron.com

www.photron.com